


BEST AVAILABLE COPY

PCT/GB 2004 / 0 0 1 8 5 1



INVESTOR IN PEOPLE

The Patent Office 2004	
Concept House	
Cardiff Road	PCT
Newport	
South Wales	
NP10 8QQ	


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

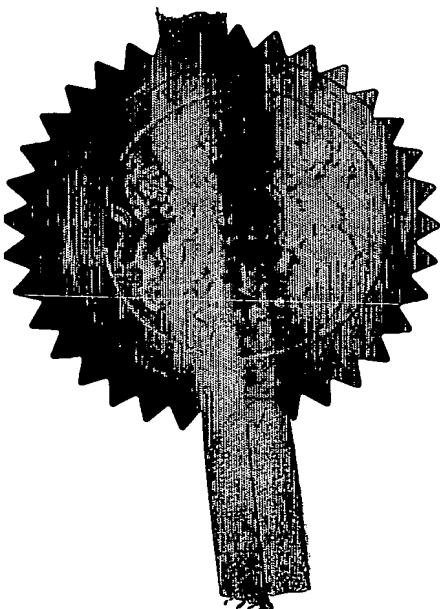

Signed

Stephen Hordley

Dated 25 May 2004



The
Patent
Office

09JUN03 ERI3371-1 001914
P01/7700 0.00-0313189.3

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

MJN/PJE/68111

2. Patent application number

(The Patent Office will fill in this part)

0313189.3

07 JUN 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ABB Offshore Systems Limited
2 High Street
Nailsea
Bristol BS48 1BS

Patents ADP number (if you know it)

769221001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom (GB)

4. Title of the invention

Linear Amplifier and Schmitt Trigger Using An Analogue Switch

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

PAGE HARGRAVE
Southgate, Whitefriars
Lewins Mead
BRISTOL BS1 2NT

Patents ADP number (if you know it)

05996483001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

4

Claim(s)

2

Abstract

1

Drawing(s)

2 x 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

-

Translations of priority documents

-

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Three

Request for preliminary examination and search (Patents Form 9/77)

One

Request for substantive examination (Patents Form 10/77)

-

Any other documents (please specify)

-

11. I/We request the grant of a patent on the basis of this application.

Signature

PAGE HARGRAVE

Date 06/06/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr M J Newstead (0117) 927 6634

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

-1-

Linear amplifier and Schmitt trigger using an analogue switch

The present invention concerns a linear amplifier and a Schmitt trigger which make use of an analogue switch.

Modern fluid extraction systems, for example hydrocarbon extraction wells, involve the installation of electronics downhole where the environmental temperature can typically be around 220° C. Therefore it is desirable to use electronic devices which can perform electronic functions at these temperatures. There are presently few integrated circuits which have been designed specifically to operate at such temperatures that are commercially available. However, wideband linear amplifiers and Schmitt triggers, both of which are important downhole components, are not yet commercially available which can operate satisfactorily at these temperatures.

It is an object of the present invention to provide a linear amplifier and a Schmitt trigger which are suitable for use at high temperatures. This object is achieved by constructing the devices using an analogue switch.

In accordance with a first aspect of the present invention there is provided a linear amplifier comprising an input terminal and an analogue switch, with a switch input connected to the input terminal and a switch output connected to the switch input to provide negative feedback.

The switch output may be connected to an output terminal.

The switch may also be connected to a supply voltage.

Preferably, the switch input is connected to the input terminal via a first resistance, and the switch output is connected to the input terminal via a second resistance, so that a closed loop gain of the amplifier may be determined from the ratio of the second and first resistances.

In a preferred embodiment, the analogue switch is configured to operate at temperatures of at least 200°C.

In accordance with a second aspect of the present invention there is provided a Schmitt trigger comprising an input terminal and an analogue switch, with a switch input connected to the input terminal and a switch output connected to the switch input to provide positive feedback.

5. The switch output may be connected to an output terminal.

The switch may also be connected to a supply voltage.

Preferably, the switch input is connected to the input terminal via a first resistance, and the switch output is connected to the switch input via a second resistance.

In a preferred embodiment, the analogue switch is configured to operate at temperatures of at least 200°C.

The invention will now be described by way of example with reference to the following figures, in which:-

Figure 1 shows a schematic circuit diagram of a linear amplifier in accordance with a first embodiment of the present invention;

Figure 2 shows a schematic circuit diagram of a known analogue switch suitable for use with the present invention; and

Figure 3 shows a schematic circuit diagram of a Schmitt trigger in accordance with a second embodiment of the present invention.

A configuration of a linear amplifier according to a first embodiment of the present invention is shown in Figure 1. The device comprises an analogue switch 1, which is preferably suitable for use at high temperatures, for example temperatures of at least about 200°C. An example of a suitable analogue switch is the quadruple analogue switch device HT 1204 DC manufactured by Honeywell, which is specifically designed for use at high temperatures and may operate

satisfactorily at 225°C. Figure 2 shows a schematic circuit diagram of one of the switches of the known Honeywell HT 1204 DC analogue switch device. The internal circuitry is shown as comprising three cascaded gates which act as amplifiers. These drive an arrangement of 8 field effect transistors (FETs). The high gain of the amplifiers results in a switching action of the FETs under normal use of the device.

The internal circuitry of such an analogue switch is shown simplified in Figure 1 as an amplifier and a switch. The analogue switch is powered by connection to a supply voltage. An output 2 from the switch is connected to an input 3 of the switch via a resistance 4, so as to provide negative feedback from the switch output to the switch input. The switch output 2 is also connected to a voltage supply via a load resistance 5, which has a typical value of about 1 k Ω . The switch input 3 is connected to an input terminal via a capacitance 6 and a resistance 7. The capacitance 6 provides DC isolation for the circuit. The closed loop gain of the configuration is the ratio of the resistances 4 and 7. Typically, resistance 4 is about 100 k Ω and resistance 7 is about 1 k Ω , resulting in a gain of around 100. A capacitance 8, typically about 3 pF, is connected across resistance 4 to provide improved high frequency stability by compensating for the input capacitance of the device. A capacitance 9, typically about 100 nF, decouples the supply at high frequencies. The supply voltage will typically be greater than about 8 V, preferably around 10 V. With this arrangement, the negative feedback prevents the output from switching, leaving the configuration to operate as a linear amplifier. The bandwidth of this linear amplifier is at least 1 MHz.

Figure 3 shows the layout of a Schmitt trigger according to the invention, where as far as possible similar components to the first embodiment have been given the same reference numerals. The circuit comprises an analogue switch 1, similar to that used in the first embodiment above, powered by connection to a supply voltage. The analogue switch has a switch input 3 connected to an input terminal via a capacitance 16, typically about 220 pF, and a resistance 17, typically about 1 k Ω . The capacitance 16 provides DC isolation for the circuit. The switch input 3 is biased close to the switching threshold by resistances 10, typically about 12 k Ω , and 11, typically about 10 k Ω . An output 12 from the switch 1 is connected to a load resistance 13, typically about 510 Ω , and is also connected to the switch input 3 via a resistance 14. The

resistance 14 provides positive feedback to the switch input 3. A capacitance 15, typically about 22 pF, is connected across resistance 14 to provide high frequency positive feedback (hysteresis). The switch output 12 is also connected to an output terminal. A capacitance 9, typically about 100 nF, acts to decouple the supply at high frequencies.

As the input voltage level rises above a threshold level, the current through resistance 13 rises, as does the voltage across it. This increased voltage is fed back to the input 3 via the resistance 14 and capacitance 15, thus creating a regenerative action causing the output to switch high. Reducing the input voltage reverses the process but with hysteresis, thus providing some degree of noise immunity as with a conventional Schmitt trigger circuit. With this configuration the supply voltage can typically be around 5 V, and may operate with a bandwidth of better than about 7 MHz.

The above embodiments are by way of example only, and many possibilities and alternatives are possible within the scope of the claims.

Claims

1. A linear amplifier comprising an input terminal and an analogue switch, with a switch input connected to the input terminal and a switch output connected to the switch input to provide negative feedback.
2. A linear amplifier according to claim 1 wherein the switch output is connected to an output terminal.
3. A linear amplifier according to any preceding claim, wherein the switch is connected to a supply voltage.
4. A linear amplifier according to any preceding claim, wherein the switch input is connected to the input terminal via a first resistance.
5. A linear amplifier according to claim 4, wherein the switch output is connected to the input terminal via a second resistance.
6. A linear amplifier according to claim 5, wherein a closed loop gain of the amplifier is determined from the ratio of the second and first resistances.
7. A linear amplifier according to any preceding claim, in which the analogue switch is configured to operate at temperatures of at least 200°C.
8. A linear amplifier as herein described as shown in Figure 1.
9. A Schmitt trigger comprising an input terminal and an analogue switch, with a switch input connected to the input terminal and a switch output connected to the switch input to provide positive feedback.

10. A Schmitt trigger according to claim 9, wherein the switch output is connected to an output terminal.

11. A Schmitt trigger according to any of claims 9 or 10, wherein the switch is connected to a supply voltage.

12. A Schmitt trigger according to any of claims 9 to 11, wherein the switch input is connected to the input terminal via a first resistance.

13. A Schmitt trigger according to claim 12, wherein the switch output is connected to the switch input via a second resistance.

14. A Schmitt trigger according to any of claims 9 to 13, in which the analogue switch is configured to operate at temperatures of at least 200°C.

15. A Schmitt trigger as hereinbefore described as shown in Figure 3.

Abstract

The invention concerns a linear amplifier and a Schmitt Trigger, both of which are suitable for use at high temperatures. Both devices comprise an analogue switch and a feedback arrangement.

Figure 1

1/2

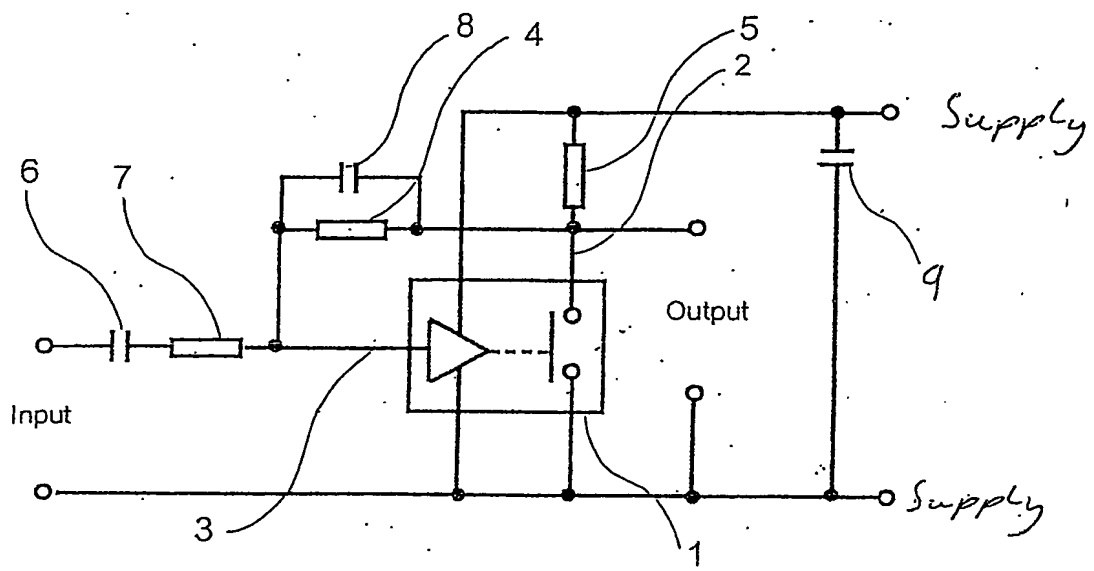


Fig 1

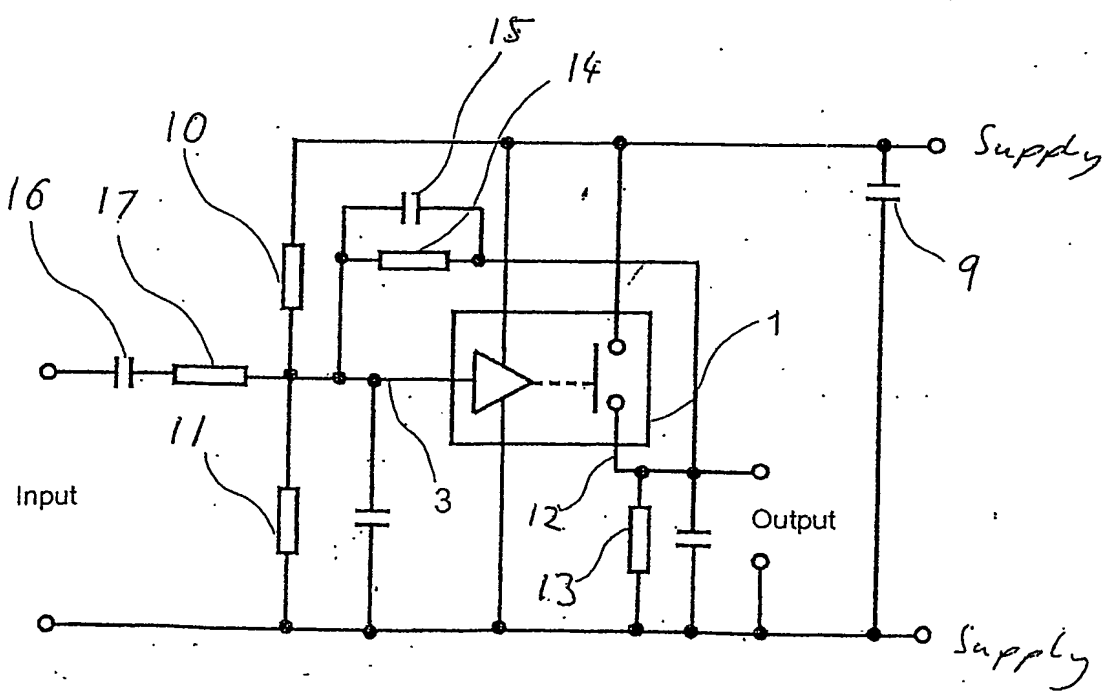


Fig 3

2/2

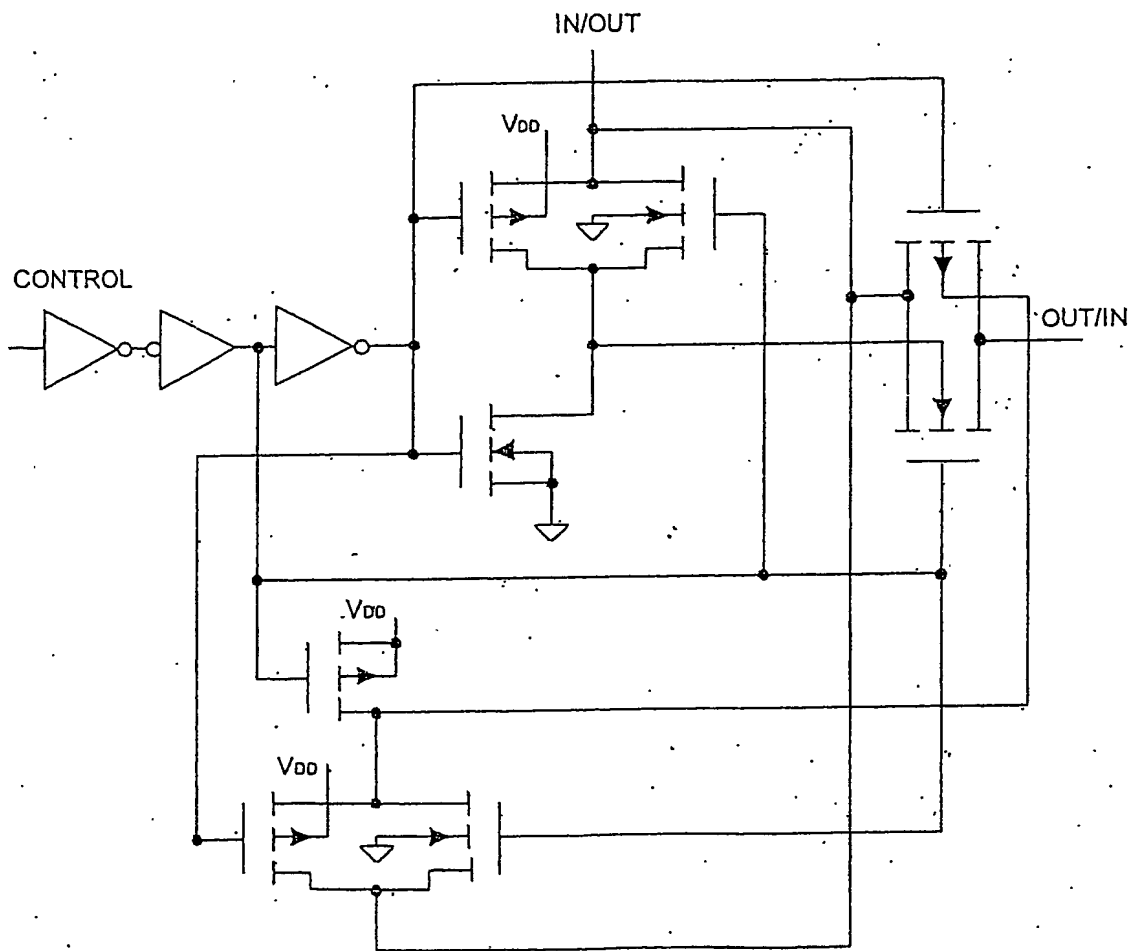


Fig 2 - Prior Art

PCT/GB2004/001851



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.